


CS 4004 A

LCD- Standard Charaktermodul

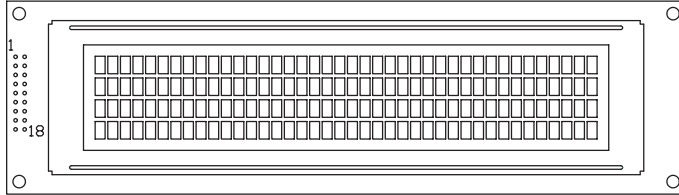

Hauptmerkmale

- 40 Charakter / 4 Zeilen
- Ziffernhöhe 4.89 mm
- Single Supply +5 Volt
- STN-Technologie
- Einstellbarer Kontrast
- Option LED / EL-Beleuchtung

Kontroller: S6A0069

PIN Belegung


PIN	SYMBOL	SIGNAL DESCRIPTION
1-8	DB7-DB0	Data Bus Line
9	E1	Enable Signal for Left
10	RS	Instruction/Data Register Select
11	R/W	Data Read/Write
12	Vo	Contrast Adjust
13	Vss	Power Supply (GND)

PIN	SYMBOL	SIGNAL DESCRIPTION
14	Vdd	Power Supply (+5V)
15	E2	Enable Signal for Right
16	NC	No Connect
17	K	Power Supply for LED (-)
18	A	Power Supply for LED (+)

Spezifikationen (TA=25 °C)

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Voltage (Logic)	Vdd-Vss	-	4.5	5.0	5.5	V
Supply Current (Logic)	Idd	Vdd=5.0V	-	1.0	2.2	mA
Driving Current (LCD)	Iee	Vee=4.2V	-	1.46	-	mA
Driving Voltage (LCD)	Vdd-Vee	-	-	4.5	-	V
Input Voltage "H"	V _{IH}	H	0.8Vdd	-	Vdd	V
Input Voltage "L"	V _{IL}	L	Vss	-	0.8	V
Output Voltage "H"	V _{OH}	H	2.4	-	-	V
Output Voltage "L"	V _{OL}	L	-	-	0.4	V

Block Diagramm

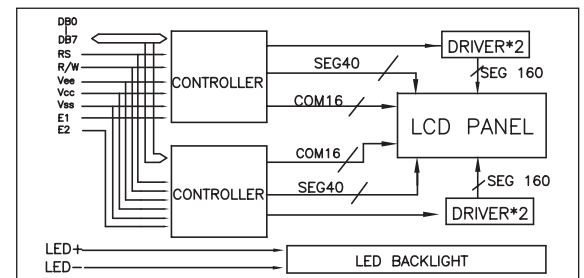

Mechanische Abmessung

