


JM 12864 K

LCD- Standard Grafikmodul

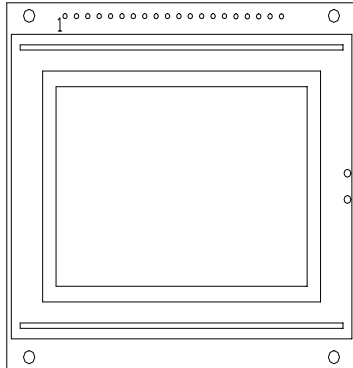

Hauptmerkmale

- 128 x 64 dots
- Einstellbarer Kontrast
- STN-Technologie

Optionen

- LED / EL- Beleuchtung
- Erhöhter Temp. Bereich
- Farbige Reflektoren
- TN-FSTN-Technologie

Kontroller: T6963C

PIN Belegung


PIN	SYMBOL	SIGNAL DESCRIPTION
1	FG	Frame Ground
2	Vss	Power Supply for Logic (GND)
3	Vdd	Power Supply for Logic (+5V)
4	V0	Contrast Adjust
5	WR\	Data Write
6	RD\	Data Read
7	CE\	Chip Enable

PIN	SYMBOL	SIGNAL DESCRIPTION
8	C/D	Command/Data Select
9	RST	Reset Signal
10-17	DB0-DB7	Data Bus Line
18	FS	Font Selection
19	K	Cathode of LED Backlight
20	A	Anode of LED Backlight

Spezifikationen (TA=25 °C)

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Voltage (Logic)	Vdd-Vss	-	4.5	5.0	5.5	V
Supply Current (Logic)	Idd	Vdd=5.0V	-	4.0	-	mA
Driving Current for LCD	Iee	Vee=-7.8V	-	2.8	-	mA
Driving Voltage for LCD	Vdd-Vee	-	-	12.8	-	V
Input Voltage "H"	V _{IH}	"H" level	Vdd-2.2	-	Vdd	V
Input Voltage "L"	V _{IL}	"L" level	Vss	-	0.8	V

Block Diagramm

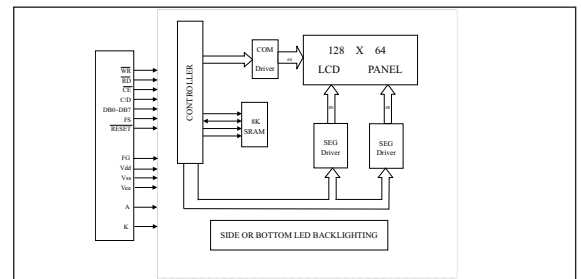

Mechanische Abmessung

