

### FEATURES

- 3-pole IEC320-C14 AC inlet, Class I
- Black color plastic enclosed case
- 2 year warranty

### ELECTRICAL SPECIFICATIONS

- Input range : 90-264VAC
- Frequency : 47-63Hz
- Inrush current : < 30A peak @115VAC; < 60A peak @230VAC cold start @25°C
- Input current (rms) : 2A @90VAC; 1A @264VAC max.
- Efficiency : > 70% @full load, 115VAC
- Maximum output power (Po) : 60Watts
- Hold-up time : > 10ms typical @full load, 115VAC
- Short Circuit Protection: Shutdown & Latch off
- Over Load Protection: Shutdown & Latch off
- Over Voltage Protection: Auto-recovery

### ENVIRONMENTAL

- Operating temperature : 0 to +60°C (Derate linearly 2.5% per °C from 41 to 60°C)
- Storage temperature : -10°C to +70°C
- Humidity: 20% ~ 90%.
- MTBF : >80,000 hours at full load and 25°C ambient temperature



### RoHS Compliant

Dimension : L155 x W85 x H50 mm ( 6.1" x 3.35" x 1.97" )  
Weight : 0.73 kgs. ( 1.61 lbs. )

### SAFETY STANDARDS

UL 60950-1  
CSA C22.2-No.60950-1  
TUV EN60950-1  
CB IEC 60950-1  
PSE

### EMC STANDARDS


FCC Class B  
CISPR22 Class B  
EN 55022 Class B  
CE

### DC OUTPUT & FEATURES

Model No.	PW-060A-4YD			
OUTPUT	Min. Load	Max. Load	Output Regulation	Ripple & Noise
+5V	2A	7A	±5%	50mV
+12V	0.2A	1.5A	±8%	120mV
-12V	0A	0.3A	±10%	120mV
+5VSB	0A	0.75A	±5%	50mV
PS-ON	Active-low, TTL-compatible signal			

- Note:**
1. Ripple and noise are measured at oscilloscope 20MHz bandwidth by a 10uF electrolytic capacitor and a 0.1uF ceramic capacitor in parallel at output connector.
  2. Total output power should not exceed 60W.

## MECHANICAL SPECIFICATION

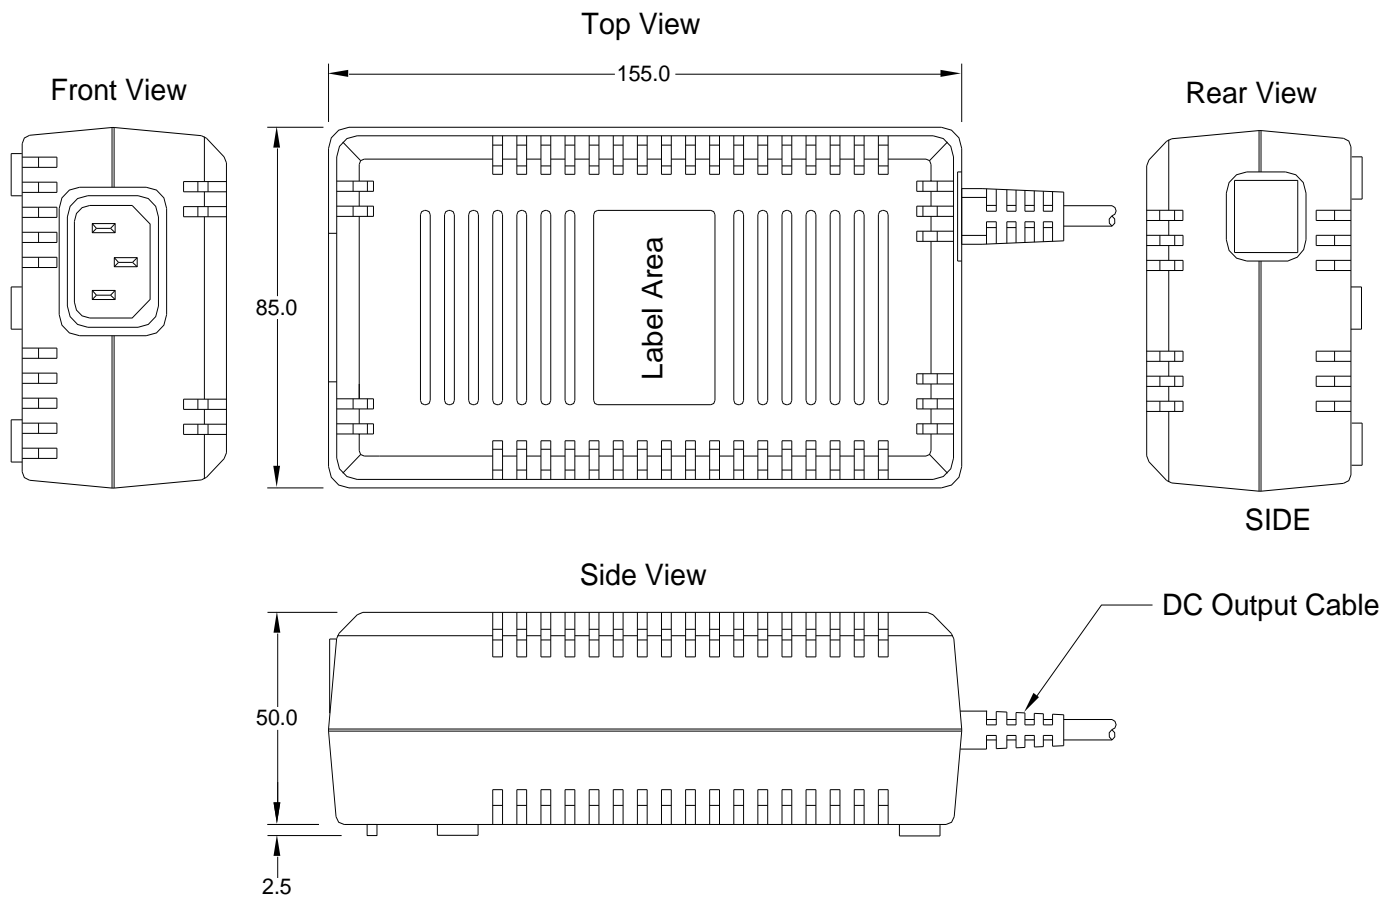

- Note:
1. AC Inlet : IEC320-C14
  2. Plastic Case Color : Black
  3. Tolerance :  $\pm 0.5\text{mm}$
  4. Unit : mm

## STANDARD OUTPUT CABLE

1. AWM 2464 # 20 AWG / 7C + SHIELDING, UL 80°C 300V VW-1, 1050 mm.
2. Depends on customers requirements.